


Thermocouples

Cable sensors

Series K5T

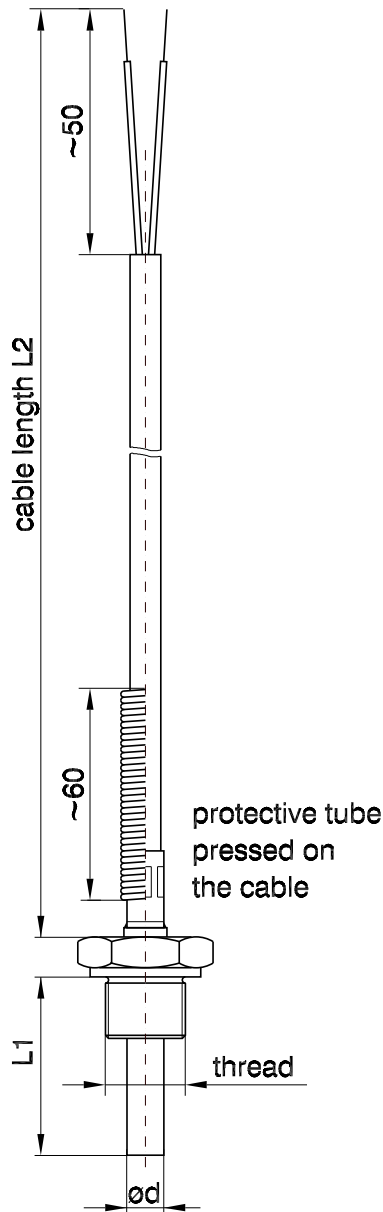

Application temperature

on inquiry, dependent on sensor and protective tube material

Thermo junction

J (Fe-CuNi) DIN EN 60584

K (NiCr-Ni) DIN EN 60584

on inquiry

Number of Thermo junction

1 thermocouple

2 thermocouples

Measuring point design

insulated of protective tube

connected to protective tube

disconnected bead at 2 thermocouples

connected bead at 2 thermocouples

Protective tube material

1.4571

on inquiry

Protective tube diameter d

on inquiry 3 ... 6 mm

Insert length L_1

on inquiry min. length of thread + 10 ... 1000 mm

Type of compensating cable

on inquiry

Cable length L_2

on inquiry min. 100 mm

Bend protection

without

with spiral spring

Thread

M10

G1/4A

G1/2A

on inquiry

Thermocouples
Cable sensors
Series K5T

Connector

free ends
connector on inquiry

declare desired temperature range for case of application